

**Top, Pattern №442****Sewing description.****Degree of difficulty - "Beginner"****Pattern pieces given with allowances for processing.****FABRIC SUGGESTIONS:**

High-thread-count, keep the shape, dress and suit fabric without stretching or with slight stretching.

**Necessary equipment:**

1. Sewing Machine.
2. Overlock.
3. Iron.
4. Ironing board

**SUPPLIES:**

1. Fabric width is 140-150 cm; the fabric length is 1,00 m – 1,30 m. Fabric consumption is given with margin in case of sewing or cutting mistake. Pattern pieces should be place on the fold of a piece of fabric.
2. Interfacing or fusible interfacing. Usage depends on fabric characteristics. Consumption depends on the width of interfacing and it selected according to the longest part.
3. Threads - 4 spools.
4. Zipper 20 - 22 cm – 1 piece
5. Bleed selvage rand of the front (optional) – from 50 cm to 70 cm.


**Seam allowances:**

Stitching line for binding – 10 mm; stitching line for lining – 7, 5 mm; to process the bottom and cuts – 40 mm.

**Note:** optional along the line of front undercut can be inserted selvage rand. Allowances bottom and sections adjust as desired.

**Description:**


Straight silhouette top with the average volume. On the front is chest darts and horizontal undercut. Back with shoulder darts and middle seam with the zipper. The bottom is of a different level: before the length above the hips, the back is the length to the hips. The side seams are made cuts. The length of ready-made top by the middle of the back in size 44 at growth 164-170 is 60,0 cm (gorge made more profound to 1,5 cm). Stitch shaping by the chest is 5,0 cm (in total volume - 10 cm), stitch shaping by the waistline is 10,0 cm (in total volume - 20,0 cm).

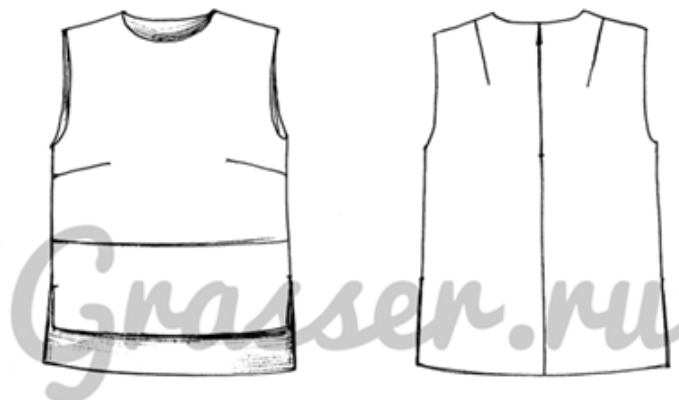

**Details:**

1. Top of front – 1 piece.
2. Bottom of front – 1 piece.
3. Back – 2 pieces.
4. Facing front – 1 piece.
5. Facing back – 2 pieces.

**Pattern pieces:**

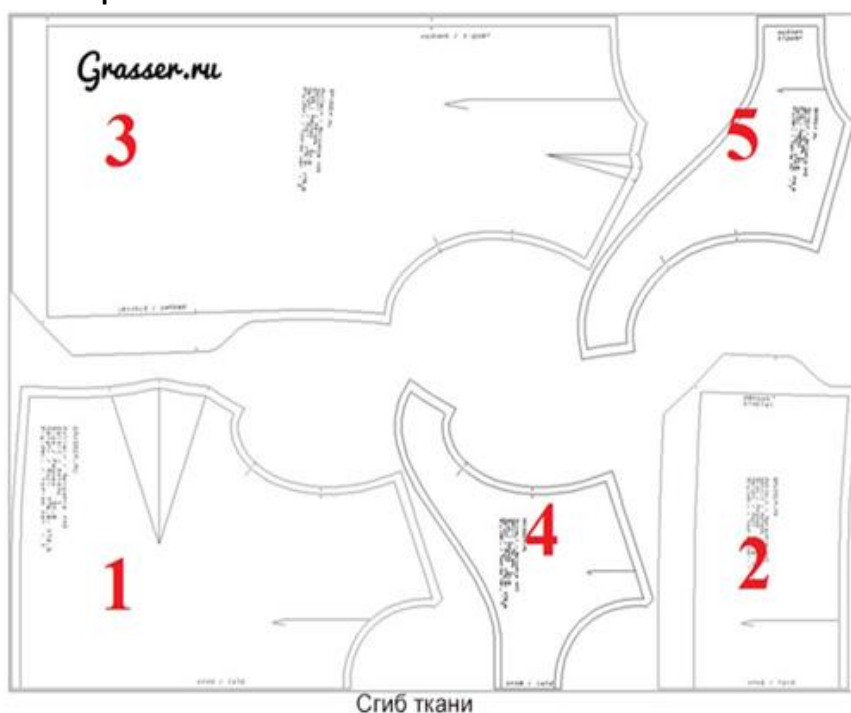

**\* Before you start sewing iron your fabric carefully. It will shrink a bit before tailoring which means parts will not get smaller during the sewing process.**

### **Recommended parts and areas for interfacing:**

- Facing front (part 4)
- Facing back (part 5)
- Allowances cuts side seams (parts 2,3)
- Allowances bottom – optional (parts 2,3)

### **User guide:**

1. Print a test square. Grid should measure 10x10 cm.
2. If sides of the square are different, adjust the print scale so that the sides of the square are 10 by 10 cm. It is necessary to follow the correct printing process of patterns. Use the instructions on our website, "How to print a pattern"- <http://en-grasser.com/about/kak-raspechatat-vykroyku/>
3. Print the pattern sheets.
4. Tape the pattern sheets together. One more user guide on how to connect patterns given in the end of the document.
5. Cut out all the individual parts of patterns.
6. Place the details of pattern on the fabric.
7. If you are satisfied with extra length of edges given in the pattern, transfer the details onto fabric and cut them out.
8. Interface the necessary details or detail areas.
9. Process breast darts on the front details.
10. Stitch the bottom part to the top. If desired, insert a selvage rand into the seam.
11. Process shoulder dart on the back details.
12. Process the middle seam of the back to the area of stitching the zipper.
13. Process a zipper in the middle of the back seam.
14. Process the shoulder seams.
15. Process the side seams before the cuts begin.
16. Process the corners of the bottom of the front and the back.
17. Process cuts. If desired, the allowance can be fixed with a finishing stitch.
18. Process the bottom of the front and the bottom of the back. If desired, the allowance can be fixed with a finishing stitch.
19. Process the shoulder seams of the front and back facings.
20. Process the side seams of the front and back facings.
21. Process a cut of a neckline and the top area of a zipper by facing.
22. Process the armholes of the garment. Each armhole is treated in two steps: it is stitching around at the front area from the shoulder to the side seam, then on the back from the shoulder to the side seam.
23. Fix the facing along the side seams.
24. Make final ironing of the garment.

**\* During the process of tailoring do not be lazy to iron parts of your garment (press seams). The thing will be sew easier and will be look better.**

---

**\*How to assembly pattern sheets guide.**

Visit our website for detailed instructions with photos on how to assembly pattern sheets - <http://en-grasser.com/about/kak-raspechatat-vykroyku/>

We shall indicate briefly how to assemble pattern sheets by GRASSER:

1. For easier connection of all parts, cut the frame at the top and at the bottom of the sheets.
2. All sheets have a combination of letters and digits in the upper left corner. (A1,B1,C1 ...)
3. Join the sheets together according to these letter marks. Spread the A's in a column. The sheets should lay from A1 to A5 starting at the top. Glue the A-sheets together along the frame line.
4. Similarly connect other letter columns.
5. Glue the columns of letters together side by side.
6. As a result, you should get the canvas as shown in the scheme:

A1	B1	C1	D1
A2	B2	C2	D2
A3	B3	C3	D3
A4	B4	C4	D4
A5	B5	C5	D5

Number of letters and digits can be different (because patterns vary in sizes), but the principle is the same: letter by letter A,B,C,D,E... placed horizontally; consecutive digits 1, 2, 3, 4, 5,... placed vertically.